

**mount**

LIGHTING THE WAY

**TRI**

by

**LUMILOGY®**

## LUMILOGY TRI

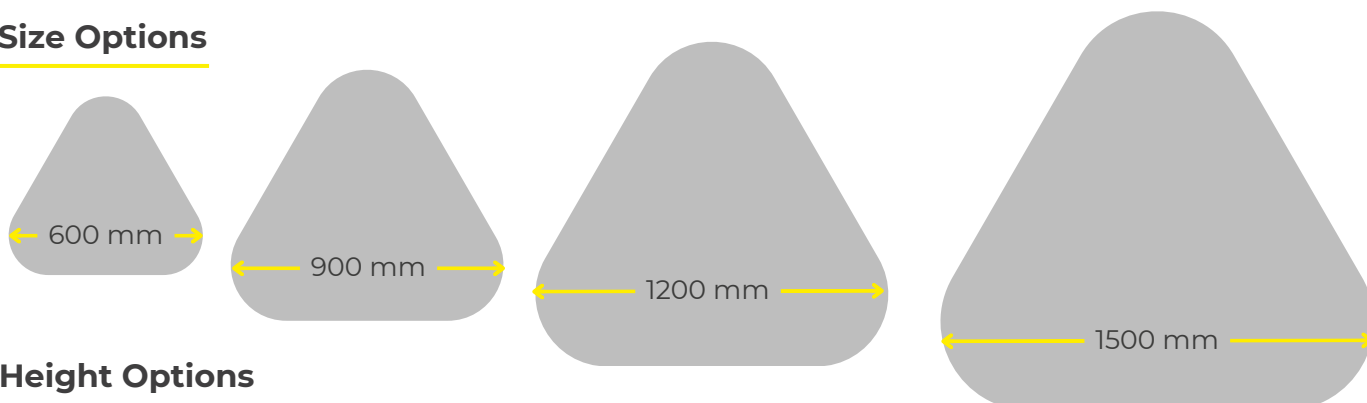


The **Lumilogy TRI** is a premium architectural luminaire that brings sculptural clarity and refined light quality to designed interiors. Its distinctive rounded triangular silhouette is both a design statement and a thoughtful lighting solution - engineered for spaces where aesthetics and well-being matter in equal measure.

- 
- // Rounded triangular feature luminaire
  - // One, two or three independent lighting circuits (downward and upward)
  - // Casambi wireless lighting control
  - // Over 400 décor options for inner and outer finishes
  - // Clean, modern design language
  - // Handmade in the EU
  - // 10-year warranty
  - // Dust-proof and maintenance-free construction
  - // Supplied with suspension kits or available for surface mounting

## LUMILOGY TRI

### Size Options



### Height Options

130mm - Regular

100mm - Slim

80mm - Lean













### Product Data

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
<b>DIRECT ONLY MODELS</b>					
TR600R	46W	3672	80	4000K	600 x 130mm
TR600S	46W	3672	80	4000K	600 x 100mm
TR600L	46W	3672	80	4000K	600 x 80mm
TR900R	67W	5400	80	4000K	900 x 130mm
TR900S	67W	5400	80	4000K	900 x 100mm
TR900L	67W	5400	80	4000K	900 x 80mm
TR1200R	92W	7344	80	4000K	1200 x 130mm
TR1200S	92W	7344	80	4000K	1200 x 100mm
TR1200L	92W	7344	80	4000K	1200 x 80mm
TR1500R	114W	9137	80	4000K	1500 x 130mm
TR1500S	114W	9137	80	4000K	1500 x 100mm
TR1500L	114W	9137	80	4000K	1500 x 80mm
<b>DIRECT/INDIRECT MODELS</b>					
TR600R/AMB	70W	6120	87	4000K	600 x 130mm
TR600S/AMB	70W	6120	87	4000K	600 x 100mm
TR600L/AMB	70W	6120	87	4000K	600 x 80mm
TR900R/AMB	104W	9000	87	4000K	900 x 130mm
TR900S/AMB	104W	9000	87	4000K	900 x 100mm
TR900L/AMB	104W	9000	87	4000K	900 x 80mm
TR1200R/AMB	141W	12240	87	4000K	1200 x 130mm
TR1200S/AMB	141W	12240	87	4000K	1200 x 100mm
TR1200L/AMB	141W	12240	87	4000K	1200 x 80mm
TR1500R/AMB	175W	15228	87	4000K	1500 x 130mm
TR1500S/AMB	175W	15228	87	4000K	1500 x 100mm
TR1500L/AMB	175W	15228	87	4000K	1500 x 80mm

## LUMILOGY TRI

### Product Options Code Builder

Section	Option Code	Description
1 CONTROL	/DA	DALI Dim
	/BTC	Casambi Dim
	/WH	PS-959 Matt White
2 FINISH	/MA	PS-992 Matt Anthracite
	/OA	FW-1286 Oak
	/CU	Custom 3M DI-NOC
3 LED CONFIGURATION	/4K	Standard 4000K
	/3K	Standard 3000K
	/AMB	Ambient 4000K direct & 3000K indirect
	/BIO	Biodynamic Tunable
	/RGBW	RGB & 4000K
4 MOUNTING TYPE	/CU	Custom LED Configuration
	/SU1	Surface Mount
	/SU2	Surface Mount with offset
	/SL1	SL1 Ceiling Rose and hangers
	/SL2	SL2 Ceiling Rose and hangers

 /WH	 /MA	 /OA	<u>Custom Finishes Brochure</u> /CU	
 /4K	 /3K	 /AMB	 /BIO	 /RGBW
 /SU1	 /SU2	 /SL1	 /SL2	<u>Other Mounting Options Available</u>

**FULL CODE EXAMPLE:** TR600R/DA/WH/BIO/SL1 = TRI Luminaire, 600x130mm, DALI Dim, PS-959 Matt White, Biodynamic Tunable, SL1 Ceiling Rose and hangers

## LUMILOGY TRI

### Other Data

WARRANTY	10 years - LED modules, BARRISOL diffuser, luminaire body 5 years - LED driver and control module
CRI	>85 typical
WEIGHT	TR600 - 10kg TR900 - 15kg TR1200 - 20kg TRI1500 - 23kg
MOUNTINGS	3 mounts, all models