

HALO



Construction


The Halo is designed to be surface mounted or suspended to a single suspension point. Available in 5 different sizes and a wide variety of RAL colours. It is the ideal option when lighting a large open space or simply wanting to create a stunning feature. The versatility of the aluminium body and LED technology used allows for inclusion of many control options, including dimming, emergency options, wireless switching and scene-setting Casambi control technology.

- // Decorative surface/suspended LED luminaire
- // European-branded LED drivers
- // Up to 97 lumens per circuit watt
- // Direct/Indirect option available - 67% / 33% ratio
- // Extruded aluminium body
- // Colour-matched ceiling rose
- // 650mm, 950mm, 1250mm, 1550mm and 1950mm diameter body options
- // LED 4000K, CRI>80, 81,000h life
- // Opal polycarbonate diffuser
- // Compatible with Casambi wireless control system
- // 5-year warranty


Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities.

Size Options

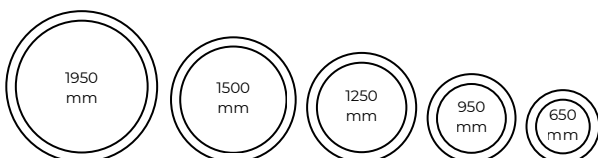

Please note: These are external diameter measurements

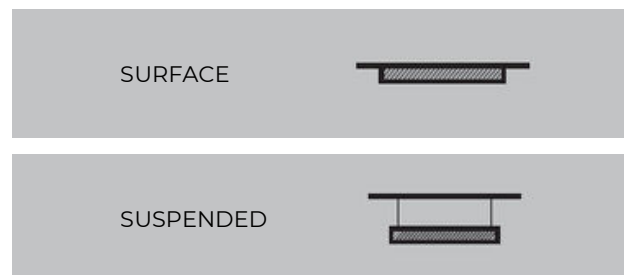

HALO

Halo Surface and Suspended

| Product Code | LED Wattage | Lumen Output | Lumen/Watt | Colour Temp. | Size |
|--------------|-------------|--------------|------------|--------------|------------------|
| HLO650 | 39W | 3101 | 79 | 4000K | 650 x 65 x 85mm |
| HLO950 | 57W | 4652 | 81 | 4000K | 950 x 65 x 85mm |
| HLO1250 | 75W | 6203 | 82 | 4000K | 1250 x 65 x 85mm |
| HLO1550 | 97W | 7753 | 80 | 4000K | 1550 x 65 x 85mm |
| HLO1950 | 115W | 9304 | 81 | 4000K | 1950 x 65 x 85mm |

Halo Suspended Direct/Indirect - 67% / 33% Ratio

| | | | | | |
|---------|------|-------|----|-------|------------------|
| HLD650 | 39W | 4502 | 93 | 4000K | 650 x 65 x 85mm |
| HLD950 | 56W | 6986 | 97 | 4000K | 950 x 65 x 85mm |
| HLD1250 | 73W | 9315 | 95 | 4000K | 1250 x 65 x 85mm |
| HLD1550 | 89W | 11644 | 96 | 4000K | 1550 x 65 x 85mm |
| HLD1950 | 112W | 13972 | 97 | 4000K | 1950 x 65 x 85mm |

Halo Code Configurator

Choose your options to generate the full Halo order code

| Section | Option Code | Description |
|---------------|-------------|------------------------------------------|
| 1 - EMERGENCY | /M | Leave blank if no emergency Emergency |
| | /MZ | DALI Emergency |
| | /ND | Non Dimmable |
| 2 - CONTROL | /DA | DALI Dimmable |
| | /BTC | Casambi Dimmable |
| 3 - FINISH | /9016 | RAL9016 White |
| | /9005 | RAL9005 Black |
| | /RA | Any RAL Colour |
| 4 - CCT | /4K | 4000K |
| | /3K | 3000K |

FULL HALO CODE EXAMPLE:

HLO950/MZ/DA/9005/4K = Halo Suspended Linear Light, 950mm, DALI Emergency, DALI Dim, Black RAL9005, 4000K

Option Images



Ceiling Rose Selector

Choose your options to generate the full Ceiling Rose order code

| Model | Ceiling Rose Dimensions (Ø x H) | Qty of hanging wires | Associated Halo Models |
|-------|---------------------------------|----------------------|------------------------|
| CR0 | 157mm x 32mm | None | Any if surface mounted |
| CR1 | 157mm x 32mm | 3 | 650mm, 950mm |
| CR2 | 157mm x 32mm | 4 | 1250mm |
| CR3 | 157mm x 32mm | 5 | 1550mm |
| CR4 | 157mm x 32mm | 6 | 1950mm |

Ceiling Rose Configurator

| Section | Option Code | Description |
|-----------------------|-------------|------------------------------------------|
| 1 - EMERGENCY | /M | Leave blank if no emergency Emergency |
| | /MZ | DALI Emergency |
| | /ND | Non Dimmable |
| 2 - CONTROL | /DA | DALI Dimmable |
| | /BTC | Casambi Dimmable |
| 3 - FINISH | /9016 | RAL9016 White |
| | /9005 | RAL9005 Black |
| | /RA | Any RAL Colour |
| 4 - SUSPENSION LENGTH | /2M | 2 metre, standard |
| | /5M | 5 metre |

FULL CEILING ROSE CODE EXAMPLE:

CR4/MZ/BTC/9005/2M = Halo Ceiling Rose, 1950mm, DALI Emergency, Casambi, Black RAL9005, 2M suspension