

ENFORCE

Low UGR Surface/Suspended LED Downlight

- // Incorporates Tridonic LED and driver system
- // Multi-faceted 60° reflector as standard
- // Finished in RAL 9016 brilliant white as standard
- // Black option available
- // 3000K and 4000K options
- // Integral emergency option
- // Dimming options available
- // Surface as standard (suspension mounting available)
- // IP20
- // CRI>80
- // 5-year warranty
- // Manufactured in UK




Construction

Our Enforce low glare downlight can help towards UGR19 compliance and has been selected for use in surface or suspended mounted applications but can also be mounted directly onto a ceiling or BESA box. The powder-coated aluminium body provides corrosion resistance and excellent heat dissipation. The high-quality reflector is sealed by a clear diffuser and the size of the fitting allows for integral emergency, dimming and smart wireless controls.

Typical Applications

Amenity Areas, Toilets, Tea-Points, Canteens, Receptions and General Office and Breakout Areas.

Dimensions

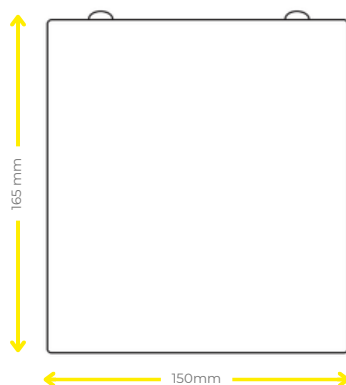

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.
ENF8	8W	1044	130	4000K
ENF14	14W	1766	128	4000K
ENF19	19W	2385	125	4000K

NOTE: Use ENFS for surface mount version

Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY		Leave blank if no emergency
	/M	Emergency
	/MZ	DALI Emergency
2 - CONTROL	/ND	Non Dim
	/DA	DALI Dim
	/BTC	Casambi Dim
3 - FINISH	/BL	RAL9005 Black
	/WH	RAL9016 White
4 - CCT	/4K	4000K
	/3K	3000K (40% less output)
5 - CRI	/80	CRI>80
	/90	CRI>90
6 - IP RATING	/20	IP20
	/54	IP54
7 - BEAM ANGLE	/MF25	25° Multi-Faceted Reflector
	/MF40	40° Multi-Faceted Reflector
	/SP40	40° Specular Reflector
	/SA50	50° Satin Reflector

FULL CODE EXAMPLE:

ENF14/DA/9005/4K/80 = Enforce Suspended Downlight, DALI Dimmable, Black RAL9005, 4K, CRI>90, IP20