

M-LINE 54 - LOW GLARE UGR19

M-LINE®



Construction



Low glare, UGR19 compliant luminaire is supplied as a suspended fitting as standard, but the profile can be utilised for surface mounting. This is achieved by directly fixing through the rear of the profile. Suspension is made simple using a single-point ceiling bracket with a 2m adjustable stainless steel wire system. The linear aluminium profile is available in standard lengths up to 4523mm with bespoke lengths and shapes available to order upon request. The low UGR is achieved with a specialised polycarbonate diffuser.

We are now sending out our M-Line products pre-flexed to make installation easy for you!

Typical Applications

General Office Areas, Conference Rooms, Educational Facilities, Retail Units, Healthcare Facilities, Hospitality and Leisure Facilities.

- // Aluminium extruded sections in 15 standard lengths
- // Bespoke lengths available in multiple increments of 560mm and 280mm
- // 3m clear flex
- // Colour options in 3000K/4000K
- // Custom shapes available subject to design
- // Incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // Uniform light and controlled beam with specialised diffuser
- // Low UGR
- // Energy efficient with over 150 lm/W
- // Lifetime >80,000 h L80 B10
- // CRI>80
- // 5-year warranty

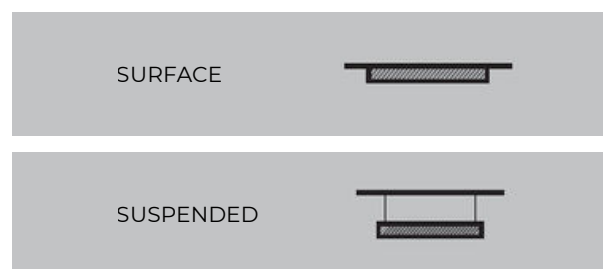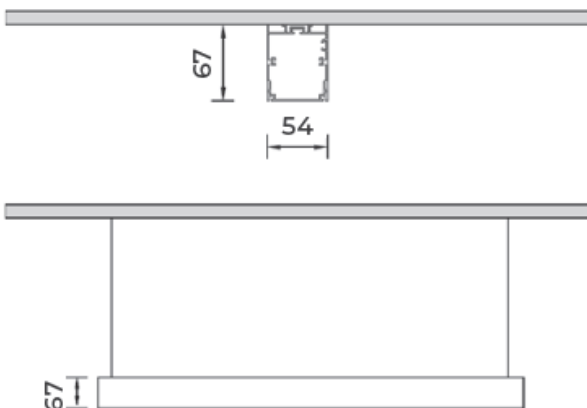

M-LINE 54 - LOW GLARE UGR19

M-LINE®



Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size
MLE54/596	10W	1548	155	4000K	596mm
MLE54/876	15W	2322	155	4000K	876mm
MLE54/1157	20W	3096	155	4000K	1157mm
MLE54/1437	25W	3870	155	4000K	1437mm
MLE54/1718	30W	4644	155	4000K	1718mm
MLE54/1998	35W	5418	155	4000K	1998mm
MLE54/2279	40W	6192	155	4000K	2279mm
MLE54/2559	45W	6966	155	4000k	2559mm
MLE54/2840	50W	7740	155	4000k	2840mm
MLE54/3120	55W	8514	155	4000k	3120mm
MLE54/3411	60W	9288	155	4000k	3411mm
MLE54/3681	65W	10062	155	4000k	3681mm
MLE54/3962	70W	10836	155	4000k	3962mm
MLE54/4242	75W	11610	155	4000k	4242mm
MLE54/4523	80W	12384	155	4000k	4523mm

NOTE: Bespoke lengths available upon request in multiple increments of 560mm and 280mm

NOTE: For surface mounted options, replace MLE with MLS

Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY	/M	Leave blank if no emergency
	/MZ	Emergency
	/ND	DALI Emergency
2 - CONTROL	/DA	Non Dimmable
	/D	DALI Dimmable
	/BTC	1-10V Dimmable
3 - FINISH	/9016	Casambi Dimmable
	/9005	RAL9016 White
	/9006	RAL9005 Black
4 - CCT	/4K	RAL 9006 Grey
	/3K	4000K LED
5 - CRI	/80	3000K LED
		CRI>80

FULL CODE EXAMPLE:

MLE54/1437/MZ/DA/9005/4K/80 = M-Line 54 Low Glare UGR19 Suspended Linear Light, 1437mm, DALI Emergency, DALI Dim, Black RAL9005, 4000K, 80

For optional features, please include the option code suffix with the product code when ordering.