

M-LINE IP RATED

M-LINE®

IP Rated Linear LED System

- // Aluminium extruded sections in 7 standard lengths
- // Bespoke lengths available in 140mm increments, up to 2268mm
- // CCT options in 3000K/4000K
- // Incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip-in gear tray for easy installation
- // Opal polycarbonate IP rated diffuser
- // DALI and Casambi dimming, and emergency options available on larger sizes
- // CRI>80 as standard, with CRI 90 options
- // 5-year warranty



Construction

The suspended IP rated system is available in seven standard lengths up to 2268mm.

Suspension is made simple using a single-point ceiling bracket with 2m adjustable stainless steel wire system.




Inner Gear Tray Clip



Hanging Bracket

Profile Dimensions

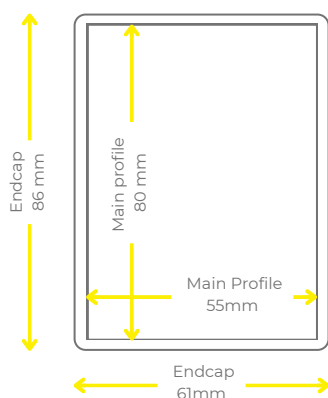

Product Code (mm)	LED Wattage	Lumen Output	Lumen / watt	Colour Temperature
MLP588	11	1253	110	4000K
MLP868	17	1880	110	4000K
MLP1148	23	2507	110	4000K
MLP1428	28	3133	110	4000K
MLP1708	34	3760	110	4000K
MLP1988	40	4387	110	4000K
MLP2268	45	5013	110	4000K

Technical Parameters

Operating Life - L70/B50 at 50°C	72,000 hrs
LED Binning	SDCM <3

Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY	/M	Leave blank if no emergency
	/MZ	Emergency
	/ND	DALI Emergency
2 - CONTROL	/DA	Non Dim
	/BTC	DALI Dim
	/BTC	Casambi Dim
3 - FINISH	/ANO	Anodised
4 - CCT	/4K	4000K LED
	/3K	3000K LED (light output - 5%)
	/RGBW	RGBW
5 - CRI	/80	CRI>80
	/90	CRI>90 (light output - 16%)

