

M-LINE LOW-GLARE RECESSED LINEAR

M-LINE®



Construction

The new premium low glare MLG recessed system from Mount Lighting utilises the same 50mm profile as standard M-Line, and is available in standard lengths up to 2824mm. Bespoke lengths and shapes are available to order.


The custom-developed lens offers an opal-like finish for aesthetics, without the glare disadvantages of opal diffusers. The standard system is designed for ceiling mounting, however, wall mounting systems can be supplied on request. Installation is simple using the easy-fix bracket system.

We are now sending out our M-Line products pre-flexed, making installation easy for you!

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities

Size Options

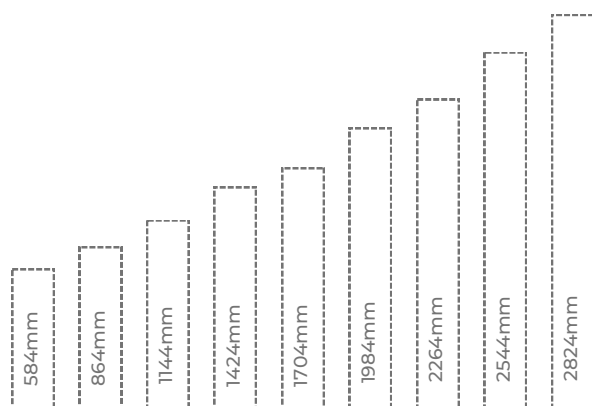

- // Aluminium extruded sections in 10 standard lengths
- // Bespoke lengths available in 47mm/140mm increments
- // Up to 118 lm/watt, 137lm/W for direct/indirect
- // Colour options in 3000K and 4000K
- // Custom lengths and shapes available subject to design
- // Incorporates Tridonic/Helvar LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip-in gear tray for easy installation
- // Low glare dual lens diffuser
- // Tuneable white and RGBW options available
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // Dual Control option available
- // CRI>80, >100,000h life expectancy
- // 5-year warranty
- // Made in Britain



RECESSED CEILING



RECESSED WALL




M-LINE LOW-GLARE RECESSED LINEAR

M-LINE®



Typical Recessed Installation


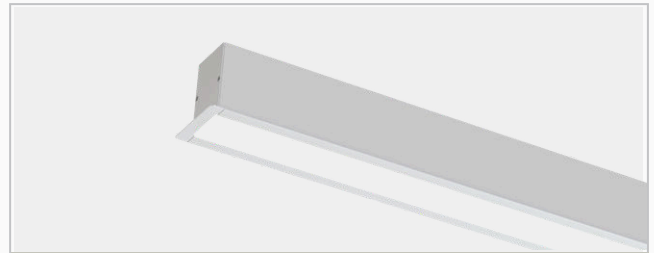


Recessed System

Recessed System					
Product Code	LED Wattage	Lumen Output	Lumen/watt	Colour Temp.	Size
MLGR584	13W	1337	102	4000K	584 x 50mm
MLGR864	19W	2005	106	4000K	864 x 50mm
MLGR1144	24W	2673	110	4000K	1144 x 50mm
MLGR1424	30W	3341	112	4000K	1424 x 50mm
MLGR1704	35W	4010	114	4000K	1704 x 50mm
MLGR1984	41W	4678	115	4000K	1984 x 50mm
MLGR2264	46W	5346	116	4000K	2264 x 50mm
MLGR2544	52W	6014	116	4000K	2544 x 50mm
MLGR2824	57W	6683	118	4000K	2824 x 50mm

NOTE: Includes 2m suspension kits (longer bespoke lengths available in 140mm increments)

Profile Dimensions

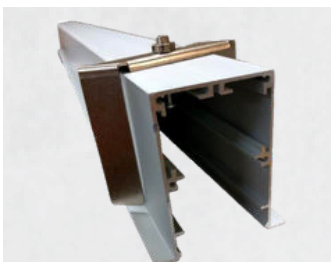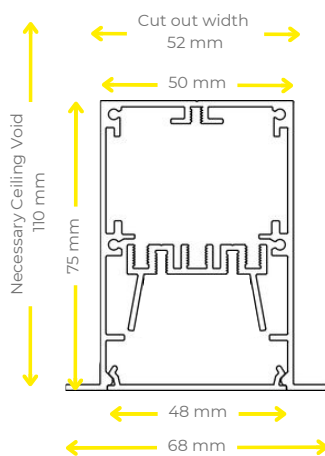

Fitted Recessed Bracket

Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY	/M	Leave blank if no emergency
	/MZ	Emergency
	/ND	DALI Emergency
2 - CONTROL	/DA	Non Dim
	/DA	DALI Dim
	/BTC	Casambi Dim
	/2DA	Dual Channel DALI Dim
	/2BTC	Dual Channel Casambi Dim
3 - FINISH	/9016	RAL9016 White
	/9005	RAL9005 Black
	/RA	Any RAL Colour
	/	See next page for new finishes
4 - CCT	/4K	4000K
	/3K	3000K (light output -6%)
5 - CRI	/80	CRI>80 (typical 84)
	/90	CRI>90

FULL CODE EXAMPLE:

MLGR1408/MZ/DA/9005/4K/80 = M-Line Low Glare Recessed Linear Light, 1408mm, DALI Emergency, DALI Dim, Black RAL9005, 4000K, CRI>80

M-LINE LOW-GLARE RECESSED LINEAR**m-LINE®****NEW FINISHES!**
Powder Coating