

M-LINE LOW-GLARE RECESSED TRIMLESS LINEAR



Construction

The new premium low glare MLG recessed trimless system from Mount Lighting utilises the same 50mm profile as standard M-Line, and is available in standard lengths up to 2808mm. Bespoke lengths and shapes are available to order.


The custom-developed lens offers an opal-like finish for aesthetics, without the glare disadvantages of opal diffusers. The standard system is designed for ceiling mounting, however, wall mounting systems can be supplied on request. Installation is simple using the easy-fix bracket system.

We are now sending out our M-Line products pre-flexed, making installation easy for you!

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities

Size Options

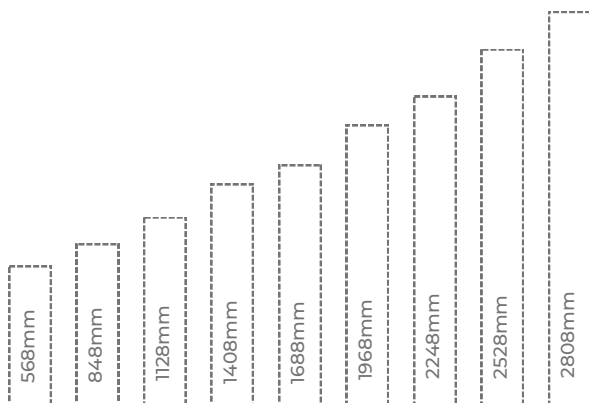

- // Unique plaster-in trim enables clean finish with ceilings
- // Aluminium extruded sections in 10 standard lengths
- // Bespoke lengths available in 47mm/140mm increments
- // Up to 118 lm/watt, 137lm/W for direct/indirect
- // Colour options in 3000K and 4000K
- // Custom lengths and shapes available subject to design
- // Incorporates Tridonic/Helvar LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip-in gear tray for easy installation
- // Low glare dual lens diffuser
- // Tuneable white and RGBW options available
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // Dual Control option available
- // CRI>80, >100,000h life expectancy
- // 5-year warranty
- // Made in Britain




RECESSED CEILING



RECESSED WALL




M-LINE LOW-GLARE RECESSED TRIMLESS LINEAR **M-LINE®**

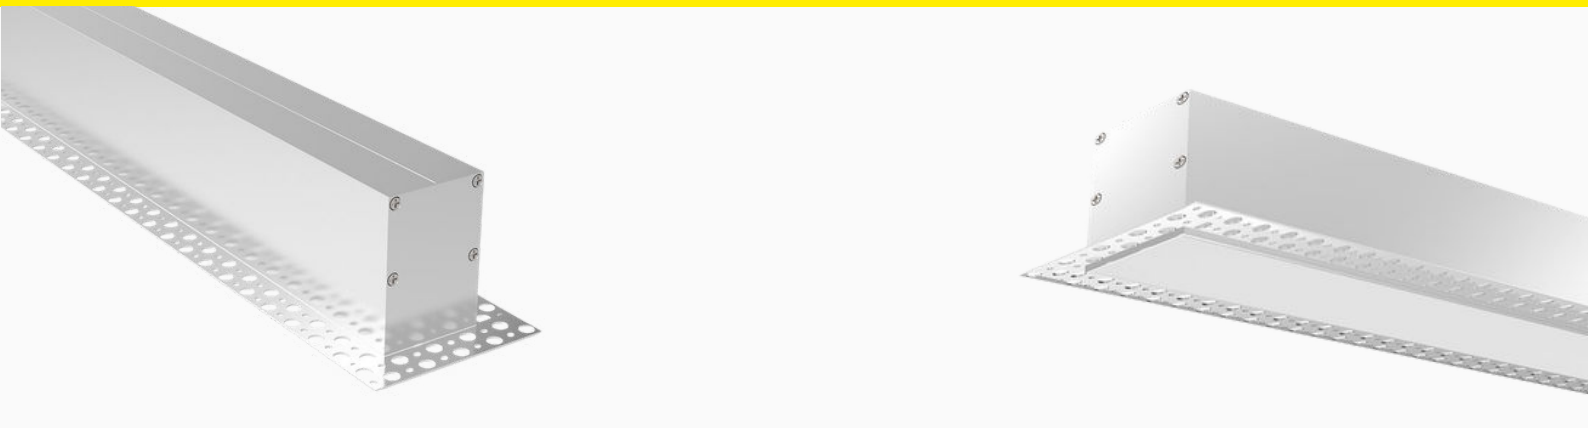

Recessed Trimless System					
Product Code	LED Wattage	Lumen Output	Lumen/watt	Colour Temp.	Size
MLGT568	13W	1337	102	4000K	568 x 50mm
MLGT848	19W	2005	106	4000K	848 x 50mm
MLGT1128	24W	2673	110	4000K	1128 x 50mm
MLGT1408	30W	3341	112	4000K	1408 x 50mm
MLGT1688	35W	4010	114	4000K	1688 x 50mm
MLGT1968	41W	4678	115	4000K	1968 x 50mm
MLGT2248	46W	5346	116	4000K	2248 x 50mm
MLGT2528	52W	6014	116	4000K	2528 x 50mm
MLGT2808	57W	6683	118	4000K	2808 x 50mm
NOTE:					

Profile Dimensions

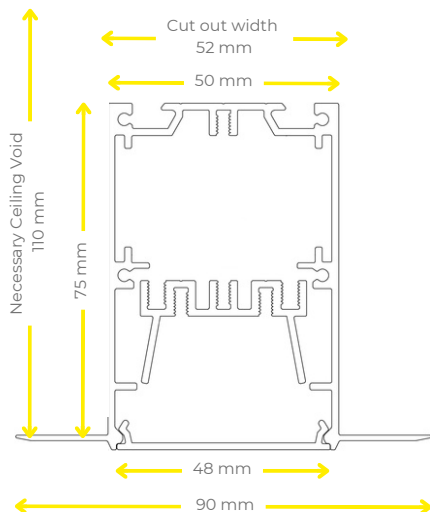

Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY		Leave blank if no emergency
	/M	Emergency
	/MZ	DALI Emergency
2 - CONTROL	/ND	Non Dim
	/DA	DALI Dim
	/BTC	Casambi Dim
	/2DA	Dual Channel DALI Dim
	/2BTC	Dual Channel Casambi Dim
4 - CCT	/4K	4000K
	/3K	3000K (light output -6%)
5 - CRI	/80	CRI>80 (typical 84)
	/90	CRI>90

FULL CODE EXAMPLE:

MLGT1408/MZ/DA/4K/80 = M-Line Low Glare Recessed Trimless Linear Light, 1408mm, DALI Emergency, DALI Dim, 4000K, CRI>80