

## M-LINE RECESSED TRIMLESS SYSTEM

## M-LINE®



### Construction

The recessed trimless system is available in standard lengths up to 2824mm, with bespoke formations and continuous lengths available to order. The standard system is designed for ceiling mounting, however, wall mounting systems can be supplied on request. Installation is simple using the easy-fix bracket system.

**We are now sending out our M-Line products pre-flexed to make installation easy for you!**


### Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities and Residential Properties.

- // Unique trim enables easy finishing with ceiling
- // Aluminium extruded sections in 9 standard lengths
- // Bespoke lengths available to order in 140mm increments
- // 106 lumens per watt
- // Colour options in 3000K/4000K/5000K
- // Custom-shaped formations available subject to design
- // Incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip-in gear tray for easy installation
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // CRI>80
- // 5-year warranty

### Size Options

Please note: these lengths do not include trim.

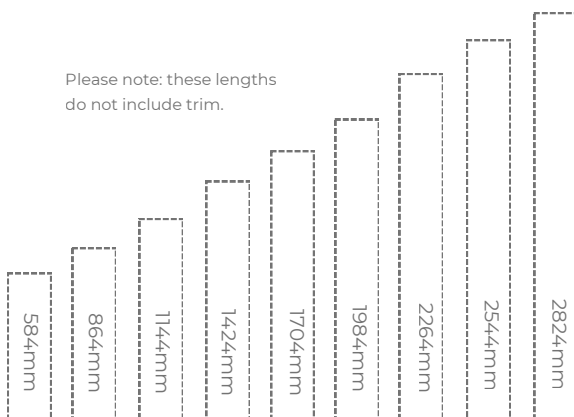

**MADE IN BRITAIN**

RECESSED CEILING





RECESSED WALL



## M-LINE RECESSED TRIMLESS SYSTEM

## M-LINE®

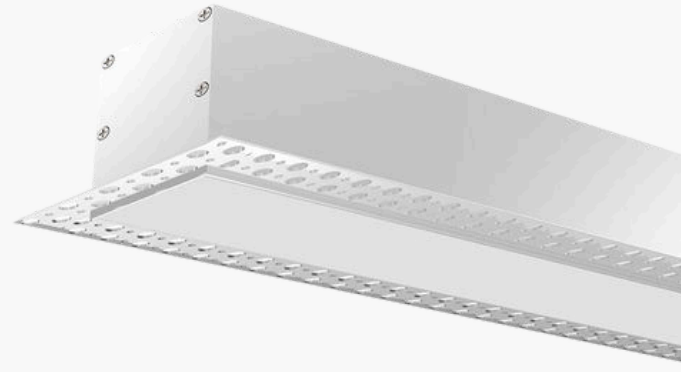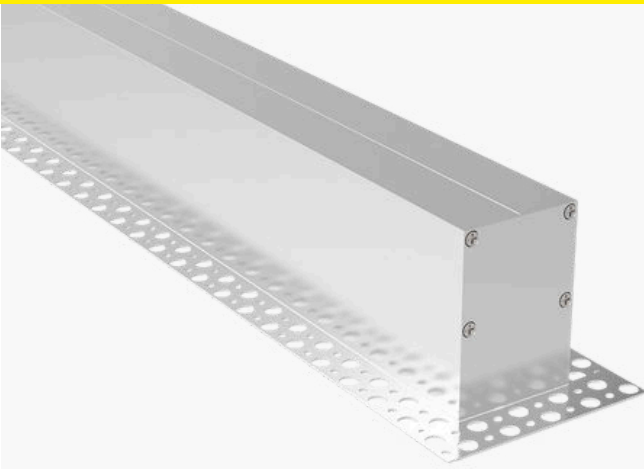


### Recessed Trimless System

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size	Cutout Dimensions
MLT584	13W	1376	106	4000K	584mm	586 x 52mm
MLT864	19W	2064	109	4000K	864mm	866 x 52mm
MLT1144	25W	2752	110	4000K	1144mm	1146 x 52mm
MLT1424	31W	3440	111	4000K	1424mm	1426 x 52mm
MLT1704	38W	4129	109	4000K	1704mm	1706 x 52mm
MLT1984	44W	4816	109	4000K	1984mm	1986 x 52mm
MLT2264	50W	5504	110	4000K	2264mm	2266 x 52mm
MLT2544	56W	6191	111	4000k	2544mm	2546 x 52mm
MLT2824	63W	6879	109	4000k	2824mm	2826 x 52mm

**NOTE:** Longer bespoke lengths available in 140mm increments

## Dimensional Drawings

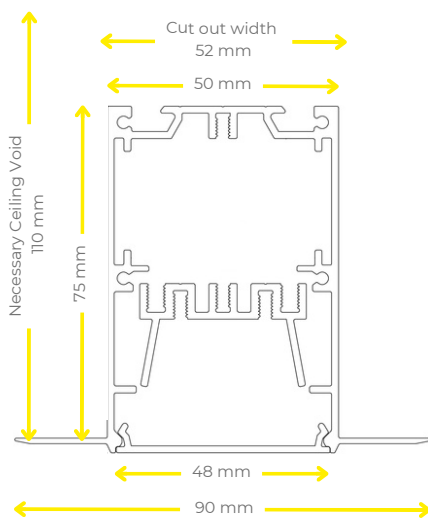

## Product Configuration

### Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY	/M	Leave blank if no emergency
	/MZ	Emergency
	/ND	DALI Emergency
2 - CONTROL	/DA	Non Dim
	/BTC	DALI Dim
	/BTC	Casambi Dim
3 - CCT	/4K	4000K
	/3K	3000K (light output -6%)
	/5K	5000K
	/TW	Tunable White
4 - CRI	/RGB	Colour Changing RGB
	/80	CRI>80 (typical 84)
	/90	CRI>90

### FULL CODE EXAMPLE:

MLT1424/MZ/DA/4K/80 = M-Line Recessed Trimless Linear Light, 1424mm, DALI Emergency, DALI Dim, 4000K, CRI>80

### LED Technical Parameters

Operating Life - L70/B50 at 50°C	102,000 hrs
LED Binning	SDCM <3