


M-LINE WALL-MOUNTED SYSTEM

M-LINE®

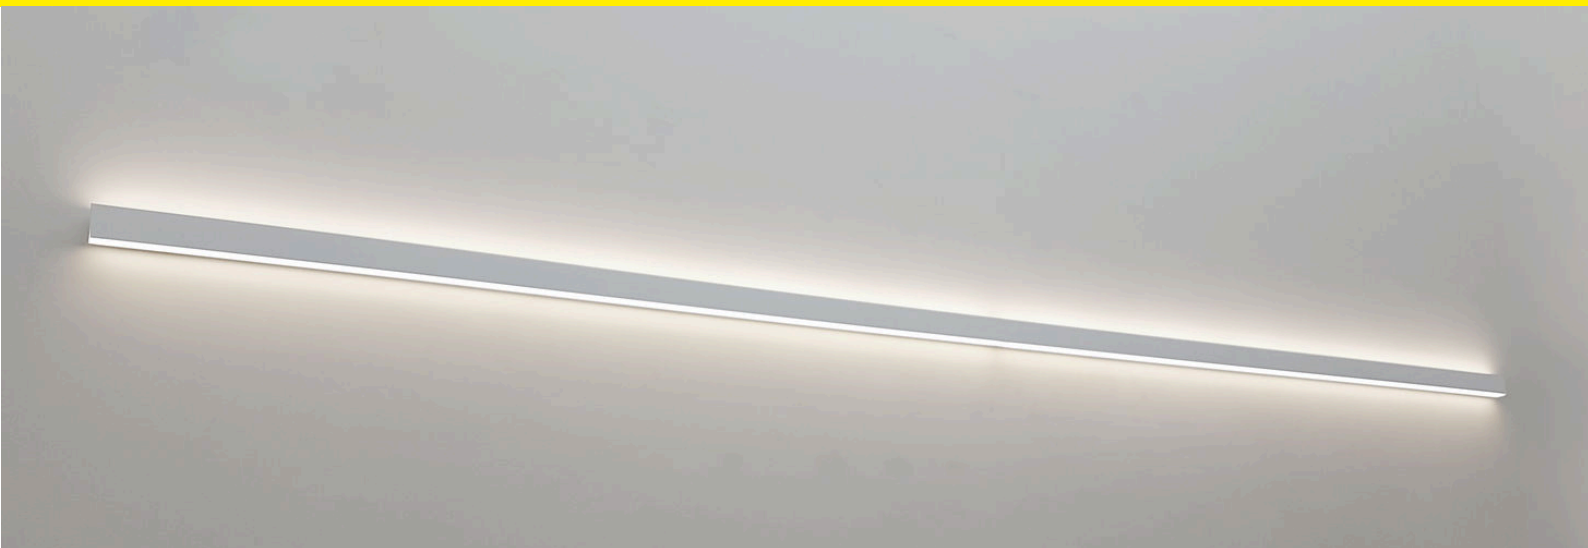

Construction


The wall-mounted system utilises the same profile as our surface and suspended system and is available in standard lengths up to 2824mm with bespoke lengths available to order. Wall mounting is achieved by directly fixing the supplied bracket to the wall and attaching through the side of the profile. Uplighting is available on lengths from 584mm upwards.

We are now sending out our M-Line products pre-flexed, making installation easy for you!


Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Hotels and Leisure Facilities, and Residential Properties.

Size Options

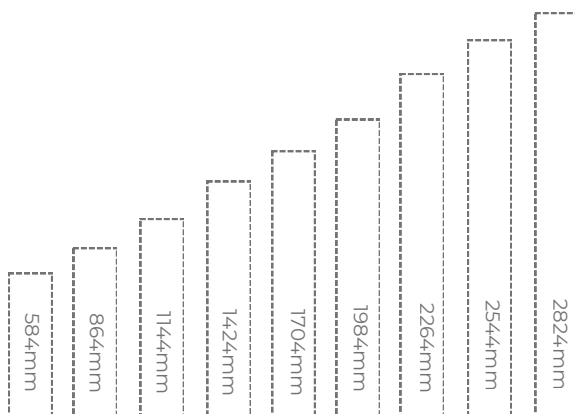

- // Aluminium extruded sections in 9 standard lengths
- // 106 lumens per watt
- // Colour options in 3000K/4000K/5000K
- // Incorporates European branded LED drivers
- // Direct/Indirect lighting options available
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Includes wall-mounted brackets
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // Dual Switch option available
- // CRI>80
- // 5-year warranty

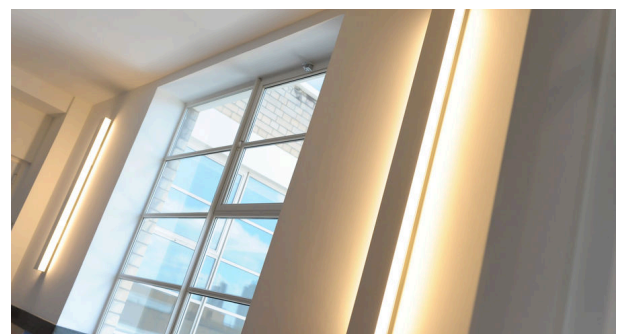


M-LINE WALL-MOUNTED SYSTEM

M-LINE®



Wall-Mounted Lighting System					
Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size
MLEW584	13W	1376	106	4000K	584mm
MLEW864	19W	2064	109	4000K	864mm
MLEW1144	25W	2752	110	4000K	1144mm
MLEW1424	31W	3440	111	4000K	1424mm
MLEW1704	38W	4129	109	4000K	1704mm
MLEW1984	44W	4816	109	4000K	1984mm
MLEW2264	50W	5504	110	4000K	2264mm
MLEW2544	56W	6191	111	4000k	2544mm
MLEW2824	63W	6879	109	4000k	2824mm
Wall-Mounted Direct/Indirect Lighting System 50% Direct/50% Indirect					
MLDW584	25W	2683	107	4000K	584mm
MLDW864	38W	4024	106	4000K	864mm
MLDW1144	50W	5366	107	4000K	1144mm
MLDW1424	62W	6707	108	4000K	1424mm
MLDW1704	74W	8051	109	4000K	1704mm
MLDW1984	86W	9390	109	4000K	1984mm
MLDW2264	100W	10732	107	4000K	2264mm
MLDW2544	112W	12073	108	4000k	2544mm
MLDW2824	124W	13415	108	4000k	2824mm
NOTE: Includes wall-mounting brackets (longer bespoke lengths available in 140mm increments)					

Dimensional Drawings

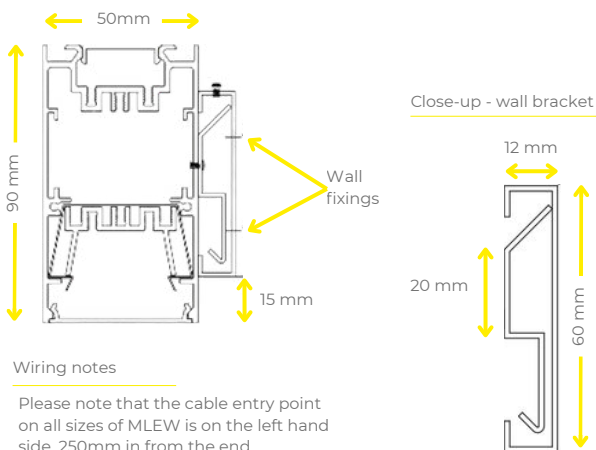

LED Technical Parameters

Operating Life - L70/B50 at 50°C	102,000 hrs
LED Binning	SDCM <3

Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY	/M	Leave blank if no emergency
	/MZ	Emergency
	/ND	DALI Emergency
2 - CONTROL	/DA	Non Dim
	/BTC	DALI Dim
	/BTC	Casambi Dim
3 - FINISH	/9016	RAL9016 White
	/9005	RAL9005 Black
	/RA	Any RAL Colour
	/	See next page for new finishes
	/4K	4000K
4 - CCT	/3K	3000K (light output -6%)
	/5K	5000K
	/TW	Tunable White
	/RGB	Colour Changing RGB
5 - CRI	/80	CRI>80 (typical 84)
	/90	CRI>90

MLEW1144/MZ/DA/9005/4K/80 = M-Line Wall-Mounted Linear Light, 1114mm, DALI Emergency, DALI Dim, Black RAL9005, 4000K, CRI>80

M-LINE WALL-MOUNTED SYSTEM**m-line®****NEW FINISHES!**
Powder Coating