


M-LINE XL RECESSED

M-LINE®

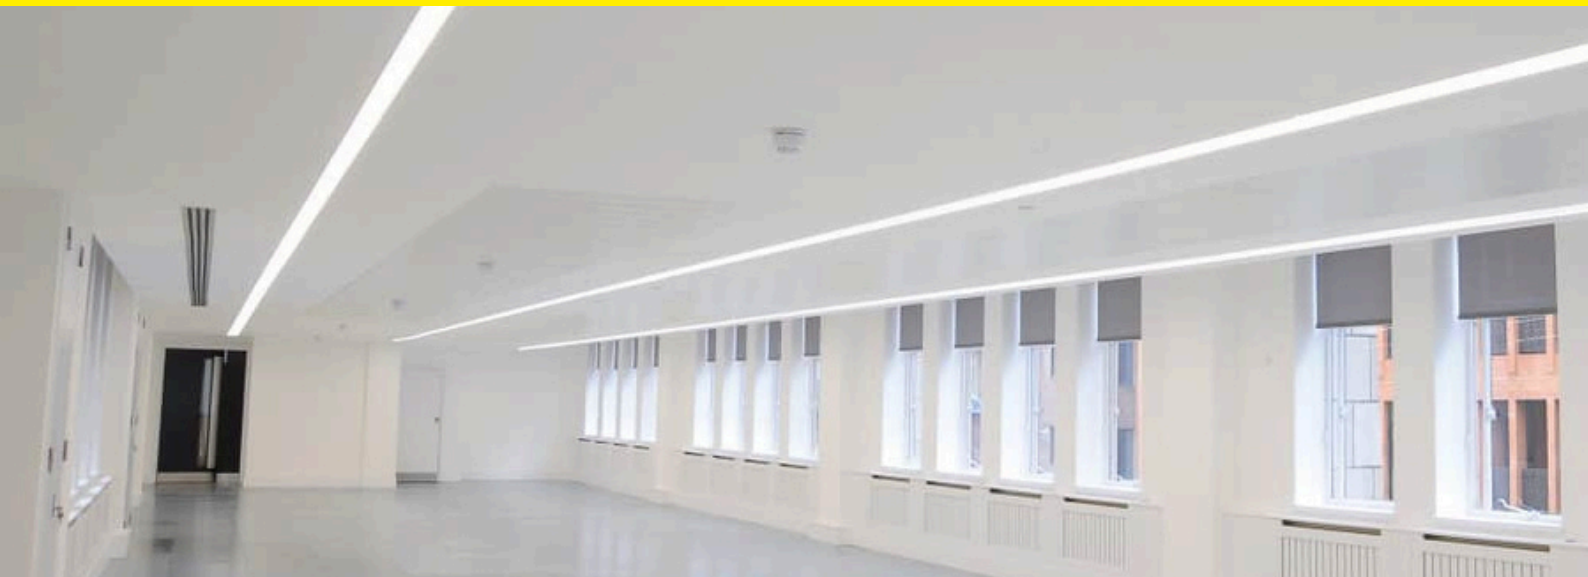


Construction

The recessed system is available in standard lengths up to 2840mm with bespoke formations and continuous lengths available to order. The standard system is designed for ceiling mounting, however, wall mounting systems can be supplied on request. Installation is simple using the easy-fix bracket system.

Typical Applications

General Office Areas, Conference Rooms, Educational Facilities, Reception Areas, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities, and Residential Properties.

Size Options

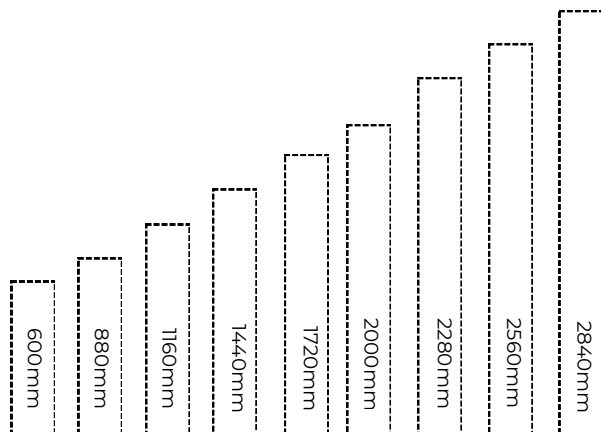

- // Aluminium extruded sections in 9 standard lengths
- // Bespoke lengths available to order in 140mm increments
- // Colour options in 3000K/4000K/5000K
- // Custom-shaped formations subject to design
- // Incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Up to 104 lumens per circuit watt
- // Clip-in gear tray for easy installation
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // 5-year warranty

 **MADE IN
BRITAIN**®

RECESSED CEILING



RECESSED WALL




M-LINE XL RECESSED

M-LINE®



Typical Recessed Installation

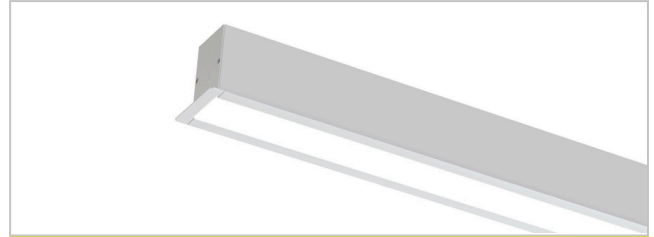

Recessed System

Recessed System						
Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size	Cutout Dimensions
MLER75/600	17W	1589	104	4000K	600mm	584 x 77mm
MLER75/880	27W	2383	104	4000K	880mm	864 x 77mm
MLER75/1160	35W	3178	104	4000K	1160mm	1144 x 77mm
MLER75/1440	43W	3972	104	4000K	1440mm	1424 x 77mm
MLER75/1720	52W	4767	104	4000K	1720mm	1704 x 77mm
MLER75/2000	60W	5562	104	4000K	2000mm	1984 x 77mm
MLER75/2280	84W	6356	104	4000K	2280mm	2264 x 77mm
MLER75/2560	78W	7150	104	4000k	2560mm	2544 x 77mm
MLER75/2840	87W	7945	104	4000k	2840mm	2824 x 77mm

NOTE: Longer bespoke lengths available in 140mm increments

Product Configuration



Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY	/M	Leave blank if no emergency
	/MZ	Emergency
	/ND	Non Dimmable
2 - CONTROL	/DA	DALI Dimmable
	/D	1-10V Dimmable
	/BTC	Casambi Dimmable
	/9016	RAL9016 White
3 - FINISH	/9005	RAL9005 Black
	/RA	Any RAL Colour
	/4K	4000K
4 - CCT	/3K	3000K
	/5K	5000K
	/TW	Tunable White
	/RGB	Colour Changing LED
5 - CRI	/80	CRI>80 (typical 84)
	/90	CRI>90

FULL CODE EXAMPLE:

MLER75/1440/MZ/DA/9005/4K/80 = M-Line 75 XL Recessed Linear Light, 1440mm, DALI Emergency, DALI Dim, Black RAL9005, 4000K, CRI>80

Dimensions

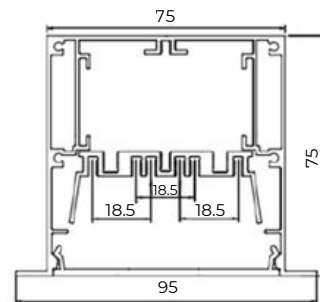

Fitted Recessed Bracket

For optional features, please include the option code suffix with the product code when ordering.