

ECO-LINE

LED Batten

- // Opal polycarbonate diffuser
- // IP20 for indoor use only
- // LED CRI>80
- // Removable gear tray for easy installation
- // BESA box entry points
- // 20mm conduit entry in end caps
- // Presence detection options
- // IK06 rating
- // 4000K as standard
- // 5-year warranty



Construction


The Eco-Line is designed to be surface mounted and, with its simple design and construction, gives superior capability. This highly efficient luminaire is not only energy saving, it is easy to fit by simply unclipping the diffuser and gear tray. The main channel of batten allows easy cable entry via the BESA entries. The polycarbonate diffuser achieves anti-glare but high light transmittance.

As standard, the luminaire utilises recognised branded LED boards and drivers.

Typical Applications

Hospitals, Warehouses, Factories, Retail and Supermarkets etc.

Dimensions

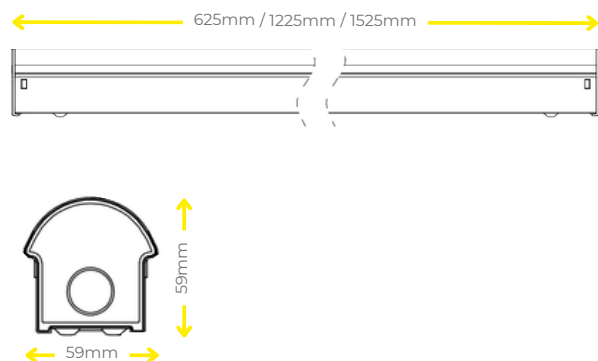

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Length
/CLE625	20W	2099	104	4000K	625mm
/CLE1225	38W	4119	107	4000K	1225mm
/CLE1525	44W	4937	112	4000K	1525mm

Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY		Leave blank if no emergency
	/M	Emergency
	/MZ	Monitored Emergency
	/ND	Non Dimmable
2 - CONTROL	/DA	DALI/DSI Dimmable Driver
	/BTC	Casambi Dimmable
	/P	Presence Detector
	/PCF	Dimmable Presence Detector

FULL CODE EXAMPLE:

CLE1225/MZ/DA/P = Eco-Line LED Batten Light, 1225mm, DALI Emergency, DALI Dimmable with Presence Detector

LED Technical Data	
Operating Life - L80/B10	72,000 hrs
LED Binning	SDCM <3

For optional features, please include the option code suffix with the product code when ordering.