

FLARE

Low-Glare Architectural Downlight

- // Discreet minimal bezel, die-cast from pure aluminium
- // Matt black darklight baffle, developed to minimise glare
- // Fitted with an integral IP44 protective lens as standard
- // Precision moulded 40° reflector
- // Tridonic LED engine and driver system
- // Excellent thermally optimised 24 super-fin die-cast heatsink
- // Short circuit, overload and temperature protection
- // Emergency and DALI dimming options
- // Life up to >50,000 hours (L80/F10)
- // CRI>80 as standard, CRI>90 option available
- // 5-year warranty
- // Manufactured in UK




Construction

The discreet, minimal bezel of the Flare is manufactured from die-cast pure aluminium for a polished and hard-wearing finish. The matt black darklight baffle ensures that glare is minimised, making it ideal for office lighting. The Flare luminaire is available with a plaster-in trimless bezel for a completely flush fit and sleek finish. If your design is more cubic, there is a square variation available upon request as well as a wall wash adaptation for a beautiful ambience.

Typical Applications

General Office Areas, Large Receptions, Boardrooms, Atriums, Educations Facilities, Hotels and Leisure Facilities, Hospitality Venues and Retail Units.

Technical Drawing

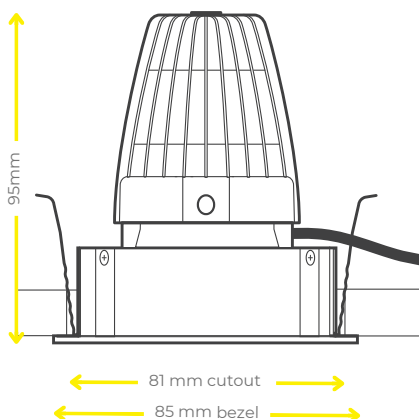

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Beam Angle
FLR6	6W	700	108	4000K	40°
FLR8	8W	900	120	4000K	40°
FLR12	12W	1325	115	4000k	40°

Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY		If no emergency required, leave blank
	/M	Emergency
	/MZ	DALI Emergency
2 - CONTROL	/ND	Non Dim
	/DA	DALI Dim
	/BTC	Casambi Dim
3 - BEZEL/BAFFLE	/WW	White Bezel, White Baffle
	/BW	Black Bezel, White Baffle
	/PW	Plaster-In Bezel, White Baffle
	/WB	White Bezel, Black Baffle
	/BB	Black Bezel, Black Baffle
	/PB	Plaster-In Bezel, Black Baffle
Note: White = RAL9003 and Black = RAL9005		
4 - CCT	/4K	4000K
	/3K	3000K (light output -5%)
	/TW	Tunable White
5 - REFLECTOR	/R40	40° beam angle
	/R20	20° beam angle
6 - CRI	/80	CRI>80
	/90	CRI>90

FULL CODE EXAMPLE:

FLR6/M/BTC/WW/TW/R40/90 - Flare 6W, Emergency, Casambi, White Bezel White Baffle, Tunable White, 40 degree beam angle, CRI>90

For optional features, please include the option code suffix with the product code when ordering.

FLARE - OPTIONS AND ACCESSORIES

Options



/M
3 Hour Maintained
Emergency



/MZ
3 Hour DALI Maintained
Emergency



/BTC
Casambi Dimmable



/PB
Plaster-In Bezel, Black Baffle



/WW
White Baffle, White Bezel



/R20
20° Narrow Beam Reflector

Product Variations



Wall wash available



Square available
(Quantum)

For optional features, please include the option code suffix with the product code when ordering.