

M-LINE 38 SURFACE AND SUSPENDED

M-LINE®



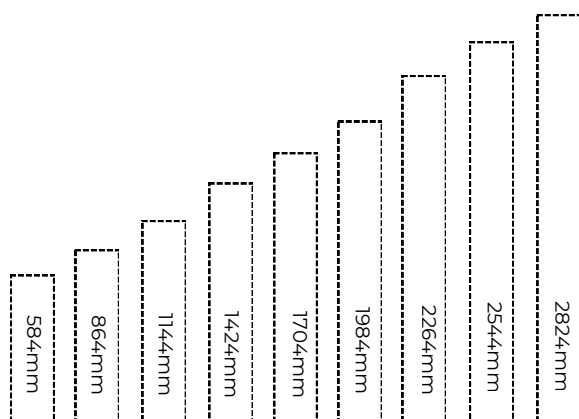
Construction

The suspended and surface system utilises the same profile and is available in standard lengths up to 2824mm with bespoke lengths available to order. Surface mounting is achieved by directly fixing through the rear of the profile. Suspension is made simple using a single point ceiling bracket with 2m adjustable stainless steel wire system. Uplighting is available on lengths from 584mm upwards. **Our M-Line 38 can be mounted onto our track.**

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities and Residential Properties.

Size Options



- // Aluminium extruded sections in 9 standard lengths
- // Bespoke lengths available in 140mm increments
- // Colour options in 3000K/4000K/5000K
- // Custom shapes available subject to design
- // Incorporates European branded LED drivers
- // Up to 104 lumens per circuit watt
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip-in gear tray for easy installation
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // Dual Switch option available



SURFACE



SUSPENDED



M-LINE 38 SURFACE AND SUSPENDED

M-LINE®



Suspended Direct Lighting System

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size
MLE38/584	13W	1298	104	4000K	584 x 38mm
MLE38/864	19W	1947	104	4000K	864 x 38mm
MLE38/1144	25W	2596	104	4000K	1144 x 38mm
MLE38/1424	31W	3245	104	4000K	1424 x 38mm
MLE38/1704	38W	3895	104	4000K	1704 x 38mm
MLE38/1984	44W	4543	104	4000K	1984 x 38mm
MLE38/2264	50W	5192	104	4000K	2264 x 38mm
MLE38/2544	56W	5841	104	4000K	2544 x 38mm
MLE38/2824	63W	6490	104	4000K	2824 x 38mm

NOTE: Includes 2m suspension kits (longer bespoke lengths available in 140mm increments)

Surface Mounted Lighting System

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size
MLS38/584	13W	1298	104	4000K	584 x 38mm
MLS38/864	19W	1947	104	4000K	864 x 38mm
MLS38/1144	25W	2596	104	4000K	1144 x 38mm
MLS38/1424	31W	3245	104	4000K	1424 x 38mm
MLS38/1704	38W	3895	104	4000K	1704 x 38mm
MLS38/1984	44W	4543	104	4000K	1984 x 38mm
MLS38/2264	50W	5192	104	4000K	2264 x 38mm
MLS38/2544	56W	5841	104	4000K	2544 x 38mm
MLS38/2824	63W	6490	104	4000K	2824 x 38mm

Suspended Direct/Indirect Lighting System

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size
MLD38/584	17W	1788	104	4000K	584 x 38mm
MLD38/864	26W	2683	104	4000K	864 x 38mm
MLD38/1144	34W	3570	104	4000K	1144 x 38mm
MLD38/1424	44W	4543	104	4000K	1424 x 38mm
MLD38/1704	53W	5518	104	4000K	1704 x 38mm
MLD38/1984	62W	6490	104	4000K	1984 x 38mm
MLD38/2264	72W	7465	104	4000K	2264 x 38mm
MLD38/2544	81W	8437	104	4000K	2544 x 38mm
MLD38/2824	91W	9411	104	4000K	2824 x 38mm

NOTE: Includes 2m suspension kits (longer bespoke lengths available in 140mm increments)

M-LINE 38 SURFACE AND SUSPENDED

M-LINE®



Suspended Direct System



Surface Mounted System

Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY		Leave blank if no emergency
	/M	Emergency
	/MZ	DALI Emergency
	/ND	Non Dimmable
2 - CONTROL	/DA	DALI Dimmable
	/D	1-10V Dimmable
	/BTC	Casambi Dimmable
	/4K	4000K LED
3 - CCT	/3K	3000K LED
	/5K	5000K LED
	/TW	Tunable White LED
	/RGB	Colour Changing LED

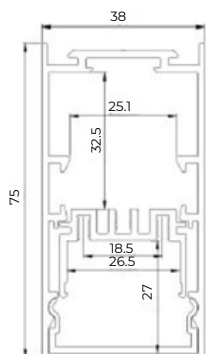
FULL CODE EXAMPLE:

MLE38/1424/MZ/DA/9005/4K = M-Line 38 Suspended Linear Light, 1424mm, DALI Emergency, DALI Dim, Black RAL9005, 4000K

Suspension Options

Option Code	Description
Supply Cable	
CR375C/3M	3 core 0.75mm clear flex cable - 3m lead
CR475C/3M	4 core 0.75mm clear flex cable - 3m lead
CR575C/3M	5 core 0.75mm clear flex cable -3m lead
MLESUS	2m Suspension kit for suspended M-Line
NOTE: Alternative length suspension kits available - POA	

Dimensional Drawings




Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)
/U (POA)	Blue (RAL 5002)
/V (POA)	Green (RAL 6018)
/T (POA)	Yellow (RAL 1021)
/K (POA)	Red (RAL 3020)
/N (POA)	Jungle
/D (POA)	Goldeneye
/O (POA)	Sahara
/L (POA)	Autumn
/R (POA)	Rusty Chain
/C (POA)	Pure chocolate
/1 (POA)	Mist
/9 (POA)	Darkrock
/I (POA)	Carbon



CR375C/3M



CR475C/3M



CR575C/3M



Clip-in Gear Tray

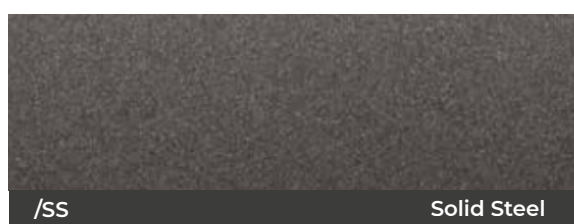
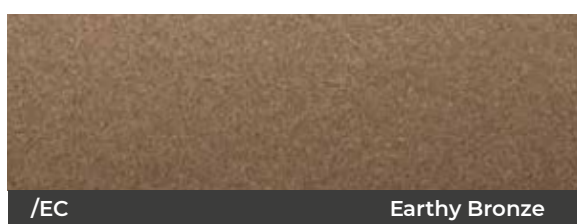
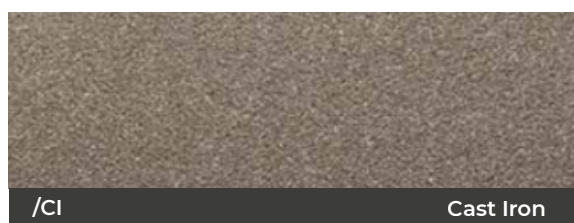
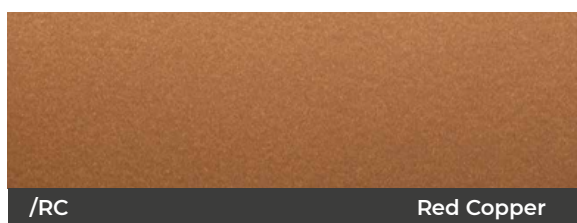
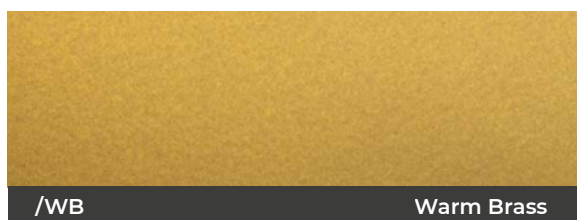


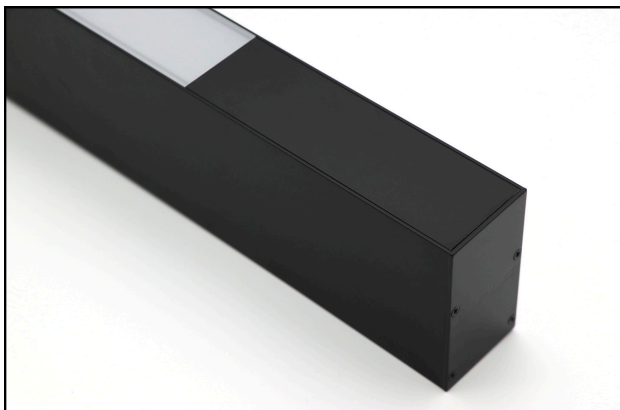
MLESUS



Track mounting options

For optional features, please include the option code suffix with the product code when ordering.

M-LINE 38 SURFACE AND SUSPENDED**m-LINE®****NEW FINISHES!**
Powder Coating

M-LINE 38 SURFACE AND SUSPENDED
M-LINE®
Available Custom Features

Blanking Sections

Blanking sections available through design service


Pre-flexed cable (suspended only)

Make installation easier


Presence Detection - Blank sections

Presence detectors can be flush mounted into the blanking section


Track Spot - Blank sections

Track spots can be mounted in a blank section of the M-Line


Quick Release Clamps

The quick-release clamp provides a tool-free secure installation method.


Uplight (suspended & wall mounted only)

For illuminating exposed and high ceilings for ambient layers of light.