

OPALITE

Compact Surface Luminaire

- // Steel base
- // Available in 3 diameters
- // White, black, brass and chrom trim options
- // Recessing bracket available
- // Presence detection options
- // IP20
- // 3000K available
- // CRI>80
- // 5-year warranty



Construction


Our Opalite luminaire has been designed as a universal option and is ideally suited to projects involving Stairwell Refurbishments, Care Homes, Social Housing and Corridor applications, in fact, anywhere a decorative internal bulkhead is required. The base is constructed using mild steel and is supplied in either a powder-coated white or black finish or in a plated finish for the brass and chrome options.

The diffuser is vacuum-formed using polycarbonate material and is supplied is Opal. As standard, the luminaire utilises branded electronic control gear from major manufacturers.


Typical Applications

Stairwells, Corridors, Store Rooms and Bedrooms.

Dimensions

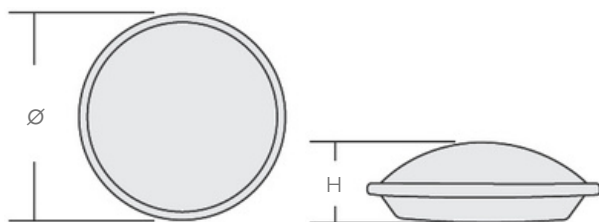

Size	Diameter	Height
A	335mm	95mm
B	435mm	105mm
C	525mm	121mm

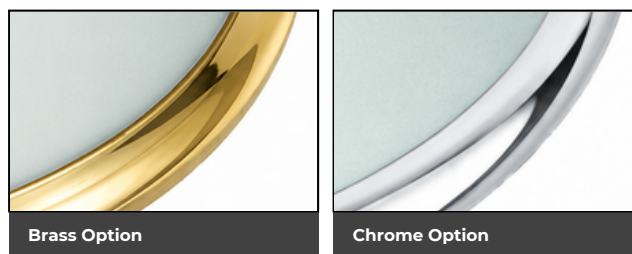

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size
OPAL335/15	15W	2034	132	4000K	A
OPAL435/15	15W	2034	132	4000K	B
OPAL435/22	22W	2822	131	4000K	B
OPAL525/34	34W	4361	131	4000K	C

Section	Option Code	Description
1 - EMERGENCY	/M	Leave blank if no emergency
	/MZ	Emergency
	/ND	Monitored Emergency
2 - CONTROL	/DA	Non Dimmable
	/BTC	DALI/DSI Dimmable Driver
	/P	Casambi Dimmable
	/PCF	Presence Detector
3 - BASE FINISH	/BLK	Dimmable Presence Detector
	/WHT	Black Base
	/CHR	White Base
	/SIL	Chrome Base
4 - CCT	/3K	Silver Base
	/4K	3000K
		4000K

Mounting Accessories	Description
/SRBRK	Semi Recessing Bracket (for sizes A & B)

LED Technical Data	
Operating Life - L80/B10	72,000 hrs
LED Binning	SDCM <3