

SONIC

High-Performance Low Glare Downlight

- // Low glare UGR<19
- // Emergency and dimming, wireless control options
- // Incorporates Philips LED module and driver system
- // Multi-faceted 40° reflector supplied as standard, with options
- // Height under 100mm using optimised thermodynamics
- // Lifetime up to >66,000 hours (L90)
- // CRI>80 and CRI>90 options
- // Various IP rating options
- // 5-year warranty
- // Manufactured in the UK



Construction


The Sonic luminaire is a highly efficient LED downlight, powered by Philips LEDs, with efficiencies up to 210 lm/W, offering a wealth of performance and control options, along with a twist and lock bezel and a range of interchangeable accessories.

Manufactured with EcoDesign regulations in mind, it is 98% recyclable and suitable for return, renew and reuse.

Typical Applications

Hospitality, Tea Points, Seating, Reception and Leisure Areas, General Office Areas

Technical Drawing

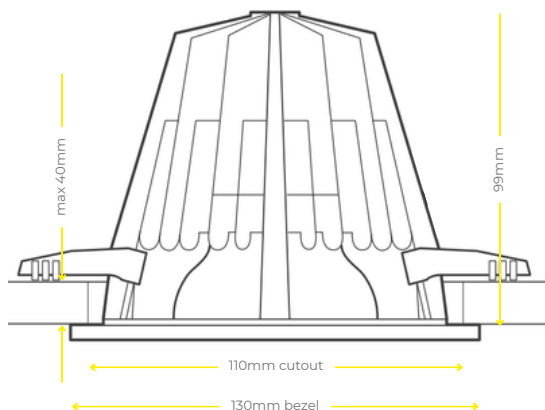




Product Code	LED Wattage	Lumen Output	Lumen/ Watt	Colour Temperature
SON8	8W	1125	210	4000K
SON13	14W	1950	201	4000K
SON19	19W	2700	191	4000K
SON27	27W	3625	180	4000K
SON40	41W	4975	165	4000K

Section	Option Code	Description
1 EMERGENCY		If no emergency required, leave blank
	/M	Emergency
	/MZ	DALI Emergency
2 CONTROL	/ND	Non Dim
	/DA	DALI Dim
	/BTC	Casambi Dim
	/WH	RAL9016 White
3 BEZEL	/OW	RAL9010 Off White
	/BL	RAL9005 Black
	/TR	Plaster-In Bezel
	/4K	4000K
4 CCT	/3K	3000K (light output -4%)
	/TW	Tunable White
	/80	CRI>80
5 CRI	/90	CRI>90
	/20	IP20
6 IP RATING	/54	IP54
	/65	IP65
7 REFLECTOR TYPE	/MF25	Multi-Faceted 25° Reflector
	/SP40	Specular 40° Reflector
	/SA50	Satin 50° Reflector
	/MF60	Multi-Faceted 60° Reflector

For optional features, please include the option code suffix with the product code when ordering.

SONIC - OPTIONS AND ACCESSORIES

Options



For optional features, please include the option code suffix with the product code when ordering.