

VERSA-LINE RECESSED

Anti-Glare Recessed Linear LED System

- // Aluminium extruded sections in 10 standard lengths
- // Bespoke lengths or shapes available in increments of 280mm
- // Colour options in 3000K/4000K and tunable white
- // Darklight concept contributing towards UGR>16 utilising the Vossloh Light&Dark lens system, along with super-efficient LEDs mounted on black or white printed circuit boards
- // Up to 182 lumens per watt
- // Remote-mounted LED drivers
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // 65° lens as standard, with 90° option
- // CRI>80, with CRI >90 option
- // Made in Britain
- // 5-year warranty



Construction

The Versa-Line anti-glare fitting is supplied as a recessed luminaire.


The linear aluminium profile is available in 10 standard lengths up to 3092 mm, with bespoke lengths and shapes available to order upon request.

The ultra low glare rating is achieved utilising the Vossloh Light&Dark system to recess and conceal the LEDs, contributing towards UGR>16.

Technical Parameters

Operating Life - L80/B10 at 50°C	72,000 hrs
LED Binning	SDCM <3
Lens Optical Efficiency	91-92%

Profile Dimensions

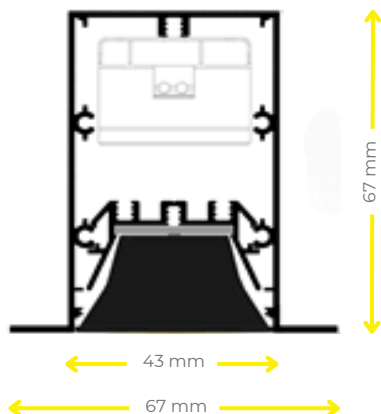

Product Code (mm)	LED Wattage	Lumen Output	Lumen / Watt	Colour Temperature	Beam Angle
VLR584	8	1380	182	4000K	65°
VLR864	11	2070	182	4000K	65°
VLR1144	15	2760	182	4000K	65°
VLR1424	19	3450	182	4000K	65°
VLR1704	22	4140	182	4000K	65°
VLR1984	26	4830	182	4000K	65°
VLR2264	30	5520	182	4000K	65°
VLR2544	34	6210	182	4000K	65°
VLR2824	37	6900	182	4000K	65°
VLR3104	41	7508	182	4000K	65°

Product Configuration

Choose your options to generate the full order code


Section	Option Code	Description
1 EMERGENCY		Leave blank if no Emergency
	/ M	3 Hour Maintained Emergency
	/ MZ	3 Hour Maintained DALI Emergency
2 CONTROL	/ ND	Non-Dim
	/ DA	DALI Dimmable Driver
	/ BTC	Casambi Dimmable Driver
3 FINISH	/ 9005	RAL9005 Black (light output -11%)
	/ 9016	RAL9016 White
4 CCT	/ 4K	4000K LED
	/ 3K	3000K LED (light output -1%)
	/ TW	2700K - 6500K LED
5 BEAM ANGLE	/ R65	65 degree lens (light output -1%)
	/ R90	90 degree lens
6 CRI	/ 80	CRI>80
	/ 90	CRI>90 (light output -15%)

FULL CODE EXAMPLE:

VLR3104/M/BTC/9016/TW/R90/90 = Versa-Line Recessed 3140mm, Emergency, Casambi Dimmable, White RAL9016, Tunable White, 90° beam angle, CRI>80

VERSA-LINE RECESSED

Available Custom Features

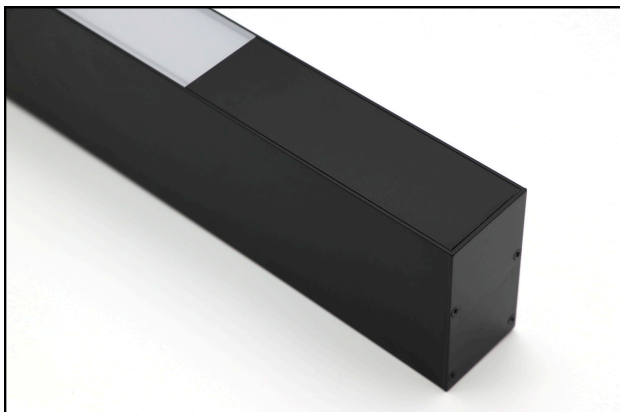

Blanking Sections

Blanking sections available through design service



Pre-flexed cable (suspended only)

Make installation easier



Presence Detection - Blank sections

Presence detectors can be flush mounted into the blanking section



Track Spot - Blank sections

Track spots can be mounted in a blank section of the Versa-Line



Quick Release Clamps

The quick-release clamp provides a tool-free secure installation method.



Uplight (suspended & wall mounted only)

For illuminating exposed and high ceilings for ambient layers of light.