


VERSA-LINE DIRECT

Anti-Glare Suspended Linear LED System

- // Aluminium extruded sections in 10 standard lengths
- // 3m clear flex
- // Bespoke lengths or shapes available in increments of 280mm
- // Colour options in 3000K/4000K and tunable white
- // Darklight concept contributing towards UGR>16 utilising the Vossloh Light&Dark lens system, along with super-efficient LEDs mounted on black or white printed circuit boards
- // Up to 182 lumens per watt
- // Incorporates Tridonic LED drivers
- // Dimmable and *emergency options available
- // Compatible with Casambi wireless control system
- // 65° lens as standard, with 90° option
- // CRI>80, with CRI >90 option
- // 5-year warranty

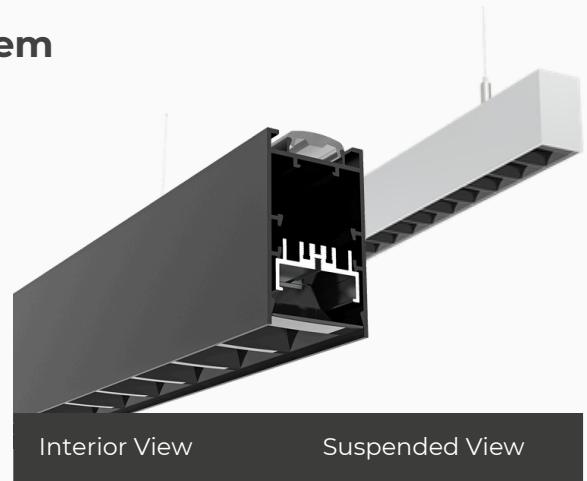


Construction

The Versa-Line anti-glare fitting is supplied as a suspended luminaire with direct only, or direct/indirect light distribution options. Suspension is made simple using a single-point ceiling bracket with a 2m adjustable stainless steel wire system. The linear aluminium profile is available in 10 standard lengths up to 3092 mm, with bespoke lengths and shapes available to order upon request. The ultra low glare rating is achieved utilising the Vossloh Light&Dark system to recess and conceal the LEDs, contributing towards UGR>16.

Technical Parameters

Operating Life - L80/B10 at 50°C	72,000 hrs
LED Binning	SDCM <3
Lens Optical Efficiency	91-92%

Profile Dimensions



Recessed option, wall washer beam angles, custom lengths and shapes, plus opal diffuser and blackout covers for different visual effects available upon request.

Product Code (mm)	LED Wattage	Lumen Output	Lumen / Watt	Colour Temperature	Beam Angle
VLE572	8	1380	182	4000K	65°
VLE852	11	2070	182	4000K	65°
VLE1132	15	2760	182	4000K	65°
VLE1412	19	3450	182	4000K	65°
VLE1692	22	4140	182	4000K	65°
VLE1972	26	4830	182	4000K	65°
VLE2252	30	5520	182	4000K	65°
VLE2532	34	6210	182	4000K	65°
VLE2812	37	6900	182	4000K	65°
VLE3092	41	7107	182	4000K	65°

Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 EMERGENCY	/ NE	No Emergency
	/ M	3 Hour Maintained Emergency
	/ MZ	3 Hour Maintained DALI Emergency
2 CONTROL	/ ND	Non-Dim
	/ DA	DALI Dimmable Driver
	/ BTC	Casambi Dimmable Driver
3 FINISH	/ 9005	RAL9005 Black (light output -11%)
	/ 9016	RAL9016 White
4 CCT	/ 4K	4000K LED
	/ 3K	3000K LED (light output -1%)
	/ TW	2700K - 6500K LED
5 BEAM ANGLE	/ R65	65 degree lens (light output -1%)
	/ R90	90 degree lens
6 CRI	/ 80	CRI>80
	/ 90	CRI>90 (light output -15%)


*Please note that emergency packs are not available below 1132mm length.

FULL CODE EXAMPLE:

VLE2812/DA/9005/TW/R65/80 = Versa-Line Suspended Direct Light, DALI Dimmable, Black RAL9005, Tunable White, 65° beam angle, CRI>80

VERSA-LINE DIRECT

Available Custom Features

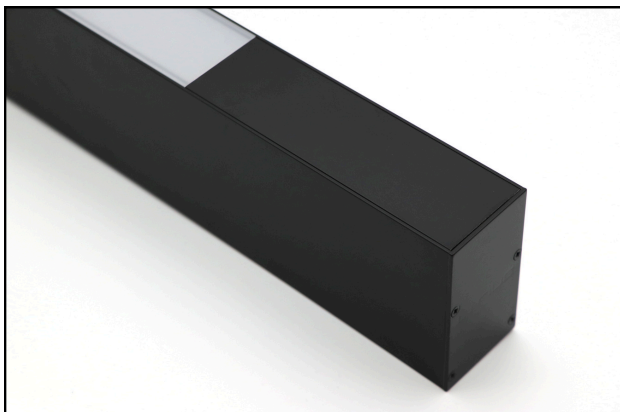

Blanking Sections

Blanking sections available through design service



Pre-flexed cable (suspended only)

Make installation easier



Presence Detection - Blank sections

Presence detectors can be flush mounted into the blanking section



Track Spot - Blank sections

Track spots can be mounted in a blank section of the M-Line



Quick Release Clamps

The quick-release clamp provides a tool-free secure installation method.



Uplight (suspended & wall mounted only)

For illuminating exposed and high ceilings for ambient layers of light.