

**mount**

LIGHTING THE WAY

# Loop W

by

**LUMILOGY®**

## LUMILOGY LOOP W




The Lumilogy **Loop W** is a bold, large-scale circular luminaire that brings a strong architectural presence to expansive interiors. Its clean, futuristic form is designed to anchor spaces visually while delivering refined, high-quality light, making it ideal for workplaces where scale and atmosphere must work together.

- 
- // Large circular feature luminaire
  - // Two or three independent lighting circuits (outer, inner and upward)
  - // Casambi wireless lighting control
  - // Modern, futuristic design language
  - // Handmade in the EU
  - // 10-year warranty
  - // Dust-proof and maintenance-free construction
  - // Supplied with suspension kits

## LUMILOGY LOOP W

### Size Options

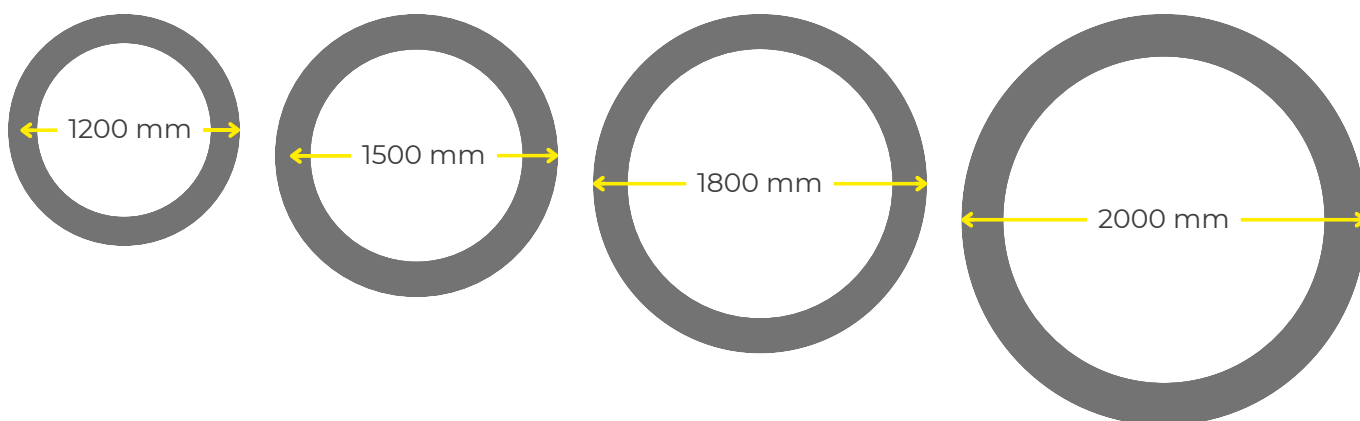

### Product Data

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
<b>DIRECT ONLY MODELS</b>					
<b>W1200</b>	81W	6480	80	4000K	1000 x 150mm
<b>W1500</b>	200W	15,984	80	4000K	1500 x 150mm
<b>W1800</b>	259W	20,736	80	4000K	1800 x 150mm
<b>W2000</b>	290W	23,424	80	4000K	2000 x 150mm
<b>DIRECT/INDIRECT MODELS</b>					
<b>W1200/AMB</b>	131W	11,520	88	4000K	1200 x 150mm
<b>W1500/AMB</b>	265W	22,536	85	4000K	1500 x 150mm
<b>W1800/AMB</b>	334W	28,224	84	4000K	1800 x 150mm
<b>W2000/AMB</b>	334W	32,169.6	96	4000K	2000 x 150mm







### Other Data

WARRANTY	10 years - LED modules, BARRISOL diffuser, luminaire body 5 years - LED driver and control module
CRI	>85 typical
WEIGHT	W1200 - 16kg W1500 - 30kg W1800 - 24kg W2000 - 40kg
MOUNTINGS	6 mounts, all models

## LUMILOGY LOOP W

### Product Options Code Builder

Section	Option Code	Description
1 CONTROL	/DA	DALI Dim
	/BTC	Casambi Dim
	/4K	Standard 4000K
2 LED CONFIGURATION	/3K	Standard 3000K
	/AMB	Ambient 4000K direct & 3000K indirect
	/BIO	Biodynamic Tunable
	/RGBW	RGB & 4000K
3 MOUNTING TYPE	/CU	Custom LED Configuration
	/SL1	SL1 Ceiling Rose and hangers
	/SL2	SL2 Ceiling Rose and hangers



**FULL CODE**  
**EXAMPLE:**

W1500/BTC/RGBW/SL1 = Loop W Luminaire, 1500mm, Casambi Dim, RGB & 4000K,  
SL1 Ceiling Rose & hangers