

## TRS31 TRACK SPOT

### IP20 LED Track Spotlight

- // Built-in electronic driver
- // Clear safety glass diffuser
- // Black extruded aluminium housing (white available)
- // Rotation: vertical 90° / horizontal 360°
- // 4000K as standard, 3000K option available
- // CRI>80 as standard, CRI>90 option available
- // Reflector and LED replacement with tools
- // Circular diamond aluminium reflectors in various degrees
- // Compatible with Casambi wireless control system
- // 5-year warranty



### Construction


The TRS31 LED track spot has been specially designed for use when high lux levels are required and is intended for use with our Stucchi multi-track system. The extruded aluminium housing can be finished in black or white colour options to fit seamlessly with your design plans. With two colour temperatures and two CRI options to choose from, you can guarantee the perfect light for the right scene.

### Typical Applications

Offices, Galleries, Theatres, Libraries, Hospitality, Task and Accent Lighting.

### Dimensional Drawing

\*Measurements are displayed in mm

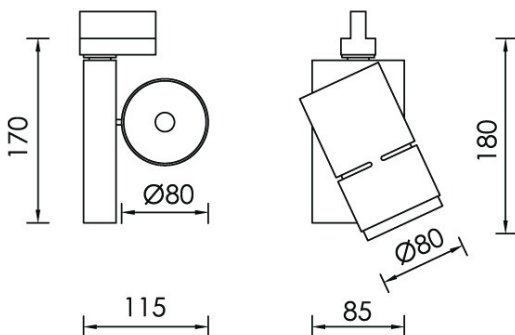

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Beam Angle
TRS31/12/3K	12W	1701	140	3000K	40°
TRS31/12/4K	12W	1786	146	4000K	40°
TRS31/16/3K	18W	2366	133	3000K	40°
TRS31/16/4K	18W	2485	140	4000K	40°
TRS31/25/3K	26W	3200	126	3000K	40°
TRS31/25/4K	26W	3360	132	4000K	40°

Section	Option Code	Description
1 - CONTROL	/ DALI	DALI Dimmable Driver
	/ TD	Mains Dimmable
	/ BTC	Casambi Dimmable Driver
2 - FINISH	/ WH	White
3 - BEAM ANGLE	/ R15	15 degree lens
	/ R24	24 degree lens
	/ R40	40 degree lens
4 - CRI	/ R60	60 degree lens
	/ 80	CRI>80
	/ 90	CRI>90

For optional features, please include the option code suffix with the product code when ordering.