

## LUMALED

### High-Power Slimline LED Downlight

- // Ideal replacement for 210mm PL downlights
- // Slimline design only 45mm
- // High-performance aluminium heat sink
- // 90° wide beam angle
- // Switchable 3 x CCT 3000K, 4000K, 5700K
- // Surface/suspension case option available in black and white
- // DALI and emergency options available
- // Dimming available when using Triac dimmer
- // IP54
- // CRI>80, 50,000 hours life
- // 5-year warranty




### Construction

Our LumaLED luminaire has been designed as a direct replacement for 210mm PL downlights. The panel surround is manufactured using white powder coated aluminium material. The high-performance heat sink is manufactured using die-cast aluminium, connection from the luminaire to the driver is a simple process utilising simple plug and play connectors. The 3 x CCT colour changeable switch makes for easy use to create the correct temperature light for the right setting.

### Typical Applications


Toilets, Corridors, Stairways, General Office Areas, Reception Areas, Conference Rooms, Retail Units, Schools, Hotels and Leisure Facilities.

### Size Options

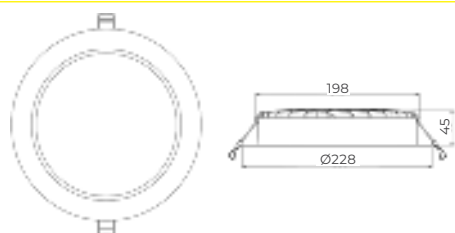

#### Size

Ø 228mm bezel      Ø 198mm cut out      H 45mm

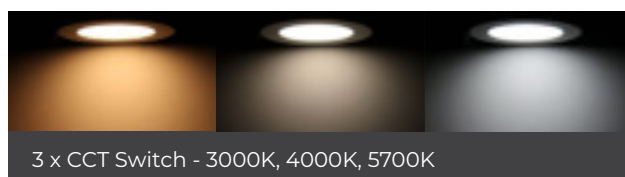

3 x CCT Switch - 3000K, 4000K, 5700K

| Product Code | LED Wattage | Lumen Output | Lumen/Watt | Colour Temperature |
|--------------|-------------|--------------|------------|--------------------|
| LLD18        | 18W         | 1881         | 104        | 4000K              |
| LLD25        | 25W         | 2613         | 104        | 4000K              |

| Option Code  | Description   |
|--------------|---|
| /D           | 1-10V Dimmable Driver                                       |
| /DALI        | DALI/DSI Dimmable Driver                                    |
| /M           | 3 Hour Maintained Emergency                                 |
| /MZ          | 3 Hour Maintained DALI Emergency                            |
| /LUM/SUR/WHT | White Surface/Suspension Case Option                        |
| /LUM/SUR/BLK | Black Surface/Suspension Case Option                        |
| /MLESUS      | Suspension Kit (3 Required Per Fitting)                     |
| /CRI         | Ceiling Rose With Central Suspension Point (Specify Colour) |

For optional features, please include the option code suffix with the product code when ordering.