

CASAMBI SALVADOR

Wired Lighting Control with Casambi

- // Integrates wired DALI drivers into the Casambi ecosystem
- // Doesn't require complex DALI configuration software, or a DALI specialist
- // Each DALI driver shows up as an individual icon in the Casambi app, for easy individual control
- // Drivers only, does not read sensor or emergency information
- // Salvador supports industry standards such as DALI D4i, DALI DT6, and DALI DT8
- // Salvador is available in powered and non-powered versions, for 16, 32 and 64 addresses



Description

Lighting control has never been easier. With Casambi now supporting the Salvador series of DALI controllers, lighting designers and electrical consultants can seamlessly integrate wired DALI drivers into the Casambi ecosystem. This means unified control, faster setup, and unmatched flexibility across both wired and wireless lighting devices.

Each DALI driver shows up as an individual icon in the Casambi app, just as standard Casambi items do, allowing extension of DALI systems into the Casambi network. This is particularly appropriate for applications with pre-built DALI wiring, such as our Multi-Track and LCM product ranges.

Each Salvador, and each connected driver, counts as one Casambi node - network maximum is 250 nodes as usual.

Product Code	Colour	Dimensions
SAL-1016/1032/1064	White	36mm x 41mm x 14mm
SAL-2016/2032/2064	White	106mm x 67mm x 28mm
Ancillary Code	Description	
/TRACK/BLK	Black enclosure for Salvador with pre-wired track adaptor and internal power supply (add code to above main product code)	
/TRACK/WHT	White enclosure for Salvador with pre-wired track adaptor and internal power supply (add code to above main product code)	


Example Code - SAL-1016/TRACK/BLK

Technical Specifications	1000 Series	2000 Series
Power Supply	DALI	230v AC, 50Hz
Radio operation frequencies	2.4 – 2.480 GHz	
Ambient temperature	-20 to +50 °C	
Weight	15g	95g
Ingress Protection	IP20	
Maximum DALI addresses	SAL-1016 - 16	SAL-2016 - 16
	SAL-1032 - 32	SAL-2032 - 32
	SAL-1064 - 64	SAL-2064 - 64
DALI output	According to PS	250mA




CASAMBI SALVADOR


Dimensions

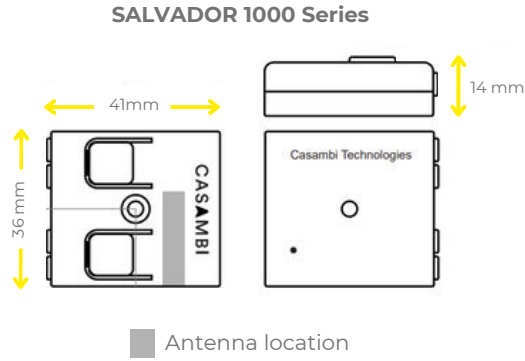

Track Mounted Version

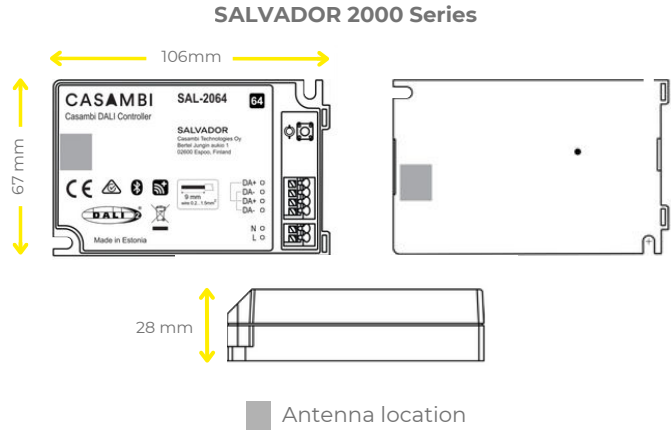

WIRING DIAGRAM - SALVADOR 1000

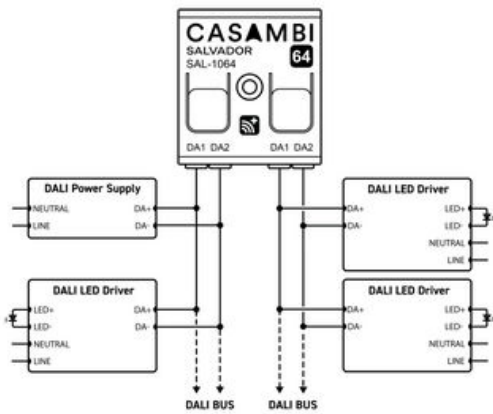

WIRING DIAGRAM - SALVADOR 2000

