

COHORT

Circular Surface Bulkhead Luminaire

- // High-performance polycarbonate diffuser and base
- // BESA box and conduit entries
- // Presence detection options
- // IP65
- // Hinged gear tray
- // 3000K available
- // CRI>80
- // 5-years warranty



Construction


Our Cohort circular bulkhead has been specifically designed as an amenity bulkhead for interior or exterior use. The fitting base and diffuser are manufactured using high-grade polycarbonate material, which has been designed to maximise the LOR, ideally suited to the use of LED lamps. To further enhance the protection this luminaire already offers, tamper-proof stainless steel screws are supplied to secure the diffuser.

As standard, the luminaire utilises branded electronic control gear which is mounted on a hinged metal gear tray to enable easy installation.

Typical Applications

External Lighting, Toilets, Store Rooms, Corridors and Warehouse Areas.

Size Options

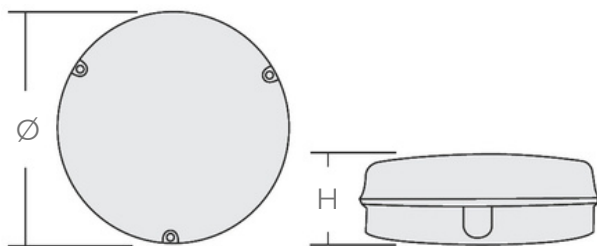

Size

Ø 320mm

H 94mm



White High Performance



Black High Performance

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature
CH15	15W	2034	132	4000K
CH22	22W	2822	131	4000K

Section	Option Code	Description
1 - EMERGENCY		Leave blank if no emergency
	/M	Emergency
	/MZ	Monitored Emergency
	/ND	Non Dimmable
2 - CONTROL	/DA	DALI/DSI Dimmable Driver
	/BTC	Casambi Dimmable
	/P	Presence Detector
	/PCF	Dimmable Presence Detector
3 - BASE FINISH	/BLK	Black Base
	/WHT	White Base
4 - CCT	/3K	3000K
	/4K	4000K

LED Technical Data	
Operating Life - L80/B10	72,000 hrs
LED Binning	SDCM <3

For optional features, please include the option code suffix with the product code when ordering.